

HI 9142W • HI 9143W

Dissolved Oxygen Meters for Wine

with Spot Check Probe



*Ideal for
Spot Checks*

ISO 9001:2000
CERTIFIED

HANNA[®]
instruments
With Great Products, Come Great Results™

HI 9142W • HI 9143W

Dissolved Oxygen Meters for Wine

with Spot Check Probe




Dissolved Oxygen (DO) is a term commonly used for the measurement of the amount of free molecular oxygen (O₂) dissolved in a unit volume of a solution usually expressed in milligrams per liter (mg/L), parts per million (ppm), or percent saturation.

Why measure for Dissolved Oxygen in wine? There are several stages where it is important to measure for Dissolved Oxygen:

1. Test for the level of oxygen during racking and tank movements. Whether its reduced or alternatively oxidized, the taste of wine can be dramatically effected by oxygen.
2. Test for oxygen pickup during pad, DE, and crossflow filtrations. DO monitoring insures consistent process control and operation of equipment.
3. Monitor micro ox treatment during maturation process. Plotting the dissolved oxygen present during treatment aids in timely and effective micro ox implementations.
4. Test the tank for the amount of oxygen after processing and before bottling. The concentration of molecular oxygen should be measured in the wine before bottling and should be less than 0.5 mg/L. If the concentration of oxygen is greater than 0.5 mg/L, it can generally be lowered by sparinging with nitrogen gas (see Zoecklein et al., 1995).
5. Test oxygen in bottled wine – During bottling, oxygen must be monitored regularly to insure minimal impact on wine quality during final filtration and filler/corker operations.

HI9143W Dissolved Oxygen meter can measure DO in bottled wine as well as in the storage tanks. This meter has automatic compensation capabilities for effects such as temperature, altitude, humidity and salinity. These conditions can all impact the accuracy of your reading and must be accounted for. This meter also comes with a probe that allows for bottle testing.

HI9142W is an easy to use and accurate dissolved oxygen meter. It comes with a specific DO probe that will allow the user to conduct measurements inside the bottled wine.

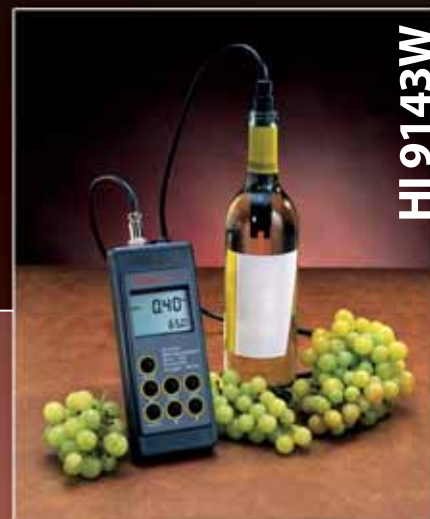

HI 9143W



HI 9142W

The HI9142W and HI9143W can be calibrated with no chemical solutions and come with a two year warranty on the meter.

SPECIFICATIONS	HI 9143W	HI 9142W
Range	O ₂ : 0.00 to 45.00 mg/L; % Saturation O ₂ : 0.0 to 300.0%; °C: 0.0 to 50.0°C	0.0 to 19.9 mg/L
Resolution	O ₂ : 0.01 mg/L; % Saturation O ₂ : 0.1% F.S.; Temperature: 0.1°C	0.1 mg/L
Accuracy (@20°C/68°F)	O ₂ : ±1.5% F.S.; % Saturation O ₂ : 1.5% F.S.; Temperature: ±0.5°C	±1.5% F.S.
Calibration	Automatic, in air, at 100%	Manual, 1 or 2 points (zero and slope)
Temp. Compensation	Automatic, 0 to 50°C (32°F to 122°F)	Automatic, 0 to 30°C
Altitude Compensation	0 to 1900 m, 100 m (328') resolution	—
Salinity Compensation	0 to 40 g/L, 1 g/L resolution	—
Probe	HI 76408 wine spot check probe with 1 m (3.3') cable (included)	
Battery Type/Life	(4) 1.5V AA/approx. 200 hours of continuous use; auto-off after 4 hours of non-use; or input for 12VDC power adapter	(4) 1.5V AA/approx. 500 hours of continuous use
Environment	0 to 50°C (32 to 122°F); 100% max RH	
Dimensions/Weight	196 x 80 x 60 mm (7.7 x 3.1 x 2.4")/500 g (1.1 lb.)	

ORDERING INFORMATION

HI 9143W is supplied with HI 76408 wine spot check D.O. probe with 1 m (3.3') cable, 2 spare membranes, HI 7041S electrolyte solution (30 mL), batteries, rugged carrying case and instructions.

HI 9142W is supplied with HI 76408 wine spot check D.O. probe with 1 m (3.3') cable, 2 spare membranes, HI 7041S electrolyte solution (30 mL), batteries, calibration screwdriver, rugged carrying case and instructions.

ACCESSORIES

HI 76408 Spot check D.O. probe for wine with 1 m (3.3') cable

HI 7040L Zero oxygen solution (500 mL)

HI 7041S Refilling electrolyte solution (30 mL)

HI 76407A/P Replacement membrane (5 pcs)

AUTHORIZED DISTRIBUTOR



HANNA[®]
instruments

With Great Products, Come Great Results™